

THIOGUARD® TST

PREMIER TECHNICAL RESOURCES — TECHNICAL GRADE TREATMENT SYSTEMS FOR ODOR, CORROSION, FOG, BIOLOGICAL, AND BIOSOLIDS PROCESSING

DID YOU KNOW?


- Because of the high solubility of both caustic soda and lime, pH often becomes biologically prohibitive before ideal alkalinity levels and process stability can be reached.
- Added without proper feed controls, the use of lime in, or prior to, primary treatment can actually reduce alkalinity going into the secondary treatment processes by precipitating CaCO₃ in the primary clarifiers.

EPA Wastewater Technology Fact Sheet Chemical Precipitation EPA 832-F-00-018 states:


- Lime produces calcium carbonate in wastewater, which acts as a coagulant for hardness and particulate matter.
- Lime is an effective phosphate removal agent, but results in a large sludge volume.
- By itself, large quantities of lime are required for effectiveness.
- Lime typically generates more sludge than other coagulants.
- The addition of lime, may increase the volume of waste sludge up to 50 percent.

THIOGUARD IS CLEARLY SUPERIOR TO LIME SLURRY AND CAUSTIC SODA

Customers have relayed to us that they are being told that lime slurry is similar to **THIOGUARD** (technical grade Magnesium Hydroxide), and can be used as an alternative in the many applications in which **THIOGUARD** is used. The simple fact: **THIOGUARD**, lime slurry and caustic soda all have different physical and chemical properties that affect how each responds to, and reacts with, the systems to which they are added. And, because of these differences in properties, the impacts they impart and the utility for their use are starkly different.

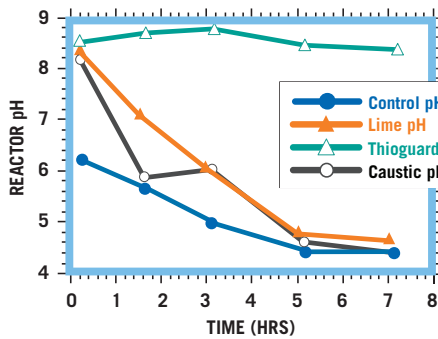

Reactor systems treated to an initial pH of 8.5 using **THIOGUARD**, caustic soda and lime. Equivalent amounts of acid added to each over time.

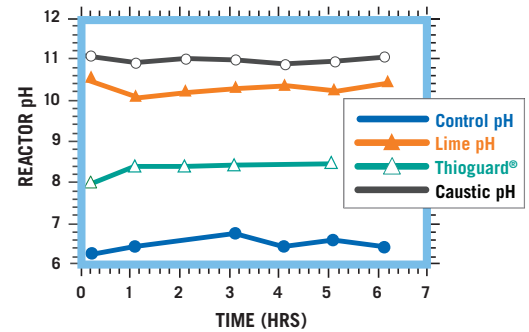

Reactor systems treated with an equivalent amount of **THIOGUARD**, caustic soda and lime. At the elevated pHs for caustic soda and lime, solids and scale begin to form and cause problems.

THE PRACTICAL CHOICE: THIOGUARD

EFFECT	THIOGUARD®	LIME	CAUSTIC SODA
Sustainable pH	YES	NO	NO
pH Spikes Above 9.0	NO	YES	YES
Alkalinity Supplements Above 25 mg/L without pH spikes	YES	NO	NO
Produces sludge	NO	YES	NO
Metabolic Stimulant	YES	NO	NO
Enhances Clarification and Dewatering	YES	YES	NO
Improves cake solids	YES	MAYBE	NO
Stabilizes biosolids	NO	YES	NO
Hazardous to handle	NO	YES	YES



Premier Magnesia, LLC is a global market leader in magnesia-based products and solutions.


VISIT THIOGUARD.COM TO REQUEST INFO OR SCHEDULE A CALL

OWNED, MINED AND PRODUCED IN THE USA

ISO 9002:1994

MILES OF PILES

The use of lime generates significant amounts of sludge in wastewater collections and treatment. On a chemical basis, one ton of lime can generate as much as 11.5 to 15.5 tons of 20% sludge cake to remove or dispose. **In contrast, THIOGUARD** reactions in wastewater produce only water and water soluble products as TDS with NO added sludge. In fact, customers using **THIOGUARD** have reported reductions of 15% - 25% in total solids/sludge produced, due to a combination of improved biological performance and reduced inorganic solids loading; go to www.THIOGUARD.com, click Downloads, and view *"THIOGUARD Takes the Cake and Makes it Better"* and *"THIOGUARD Bridges the Cation Gap – Saves Money in Biosolids Removal."*

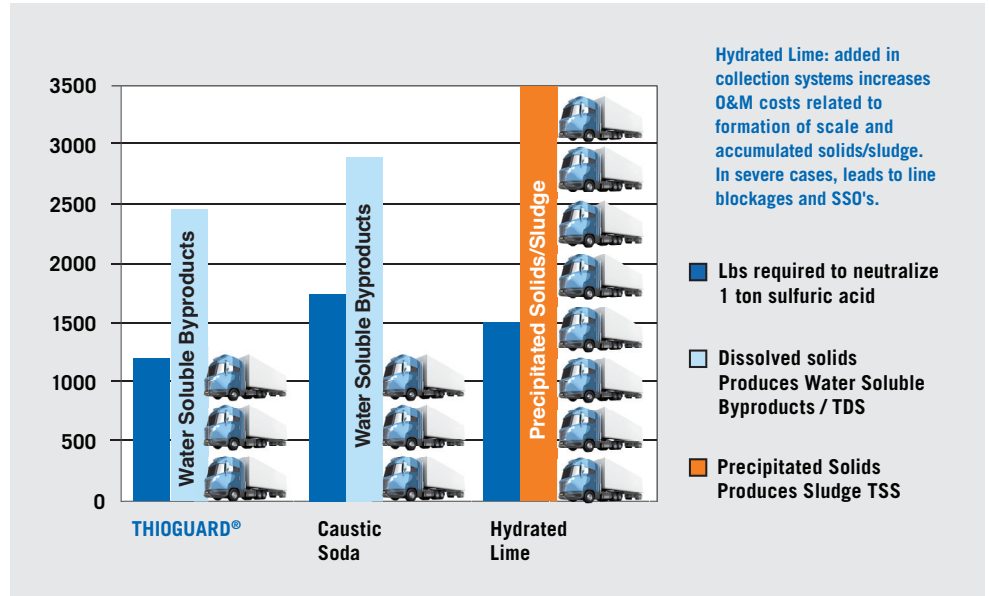

UNEXPECTED CONSEQUENCES

COMPETING REACTIONS: LIME SOFTENING VERSUS ALKALINITY ADDITION

IT IS OFTEN DIFFICULT TO BALANCE THE COMPETING REACTIONS OF LIME SOFTENING AND ALKALINITY SUPPLEMENTATION WITH THE USE OF LIME IN WASTEWATER.

With growing needs for alkalinity in nitrification and BNR processes, operators are often faced with the challenge of supplying higher levels (in excess of 30 mg/L) of alkalinity without upsetting processes or depleting the chemical budget.

On the surface, the cheap cost of lime is an appealing choice. When evaluated in its entirety, it is rare that lime is the most cost effective choice for pH modification and alkalinity supplementation.

WHY? Because lime softening often gets in the way of alkalinity supplementation. Through unintended lime softening, alkalinity levels can be depleted going into secondary treatment. This alkalinity depletion often goes unnoticed because it is masked by pH elevation, which is often assumed to be linked proportionately to alkalinity.

Moreover, unless pH is carefully monitored at BOTH bio-reactor influent AND effluent, pH spikes and instability in the aeration basins and BNRs leads to inefficient biological processes. This inefficiency prompts many operators to increase MLSS, MCRTs/SRTs, and oxygen addition, which in turn leads to increased energy and solids disposal costs.

THIOGUARD's specific chemical and physical properties ADD alkalinity to the water system, moderately modify pH, stimulate biological activity and improve solids quality.

IMITATION IS THE SINCEREST FORM OF FLATTERY

For years, competitors have claimed that our odor control strategy would either not work at all or would lead to downstream flare off of H₂S, but academic and field studies have confirmed the superior performance of **THIOGUARD's** unique chemical and physical properties in reducing H₂S and other organic odors AND improving performance of wastewater treatment plants. In recent years, some competitors have tried to duplicate our results using caustic soda or lime, ignoring that these hydroxides lack the physico-chemico properties of technical grade magnesium hydroxide...but the efforts only help validate the successes of **THIOGUARD**.

CHEMICAL PROPERTIES OF TECHNICAL GRADE MAGNESIUM HYDROXIDE, CAUSTIC SODA AND LIME

PROPERTY	50% NaOH	30% Ca(OH) ₂	60% Mg(OH) ₂
% Hydroxide	42.5	45.9	60.3
Solubility(H ₂ O, g/100ml)	42	.0185	0.0009
Per Million Gallons	1750 tons	7.7 tons	75 lbs
Reactive pH	14	12.5	9.0
Freezing Point °F	61	32	32
Weight Equivalency	1.37	1.25	1